


**TESTING A DCC
DECODER OUTSIDE
THE LOCO.**

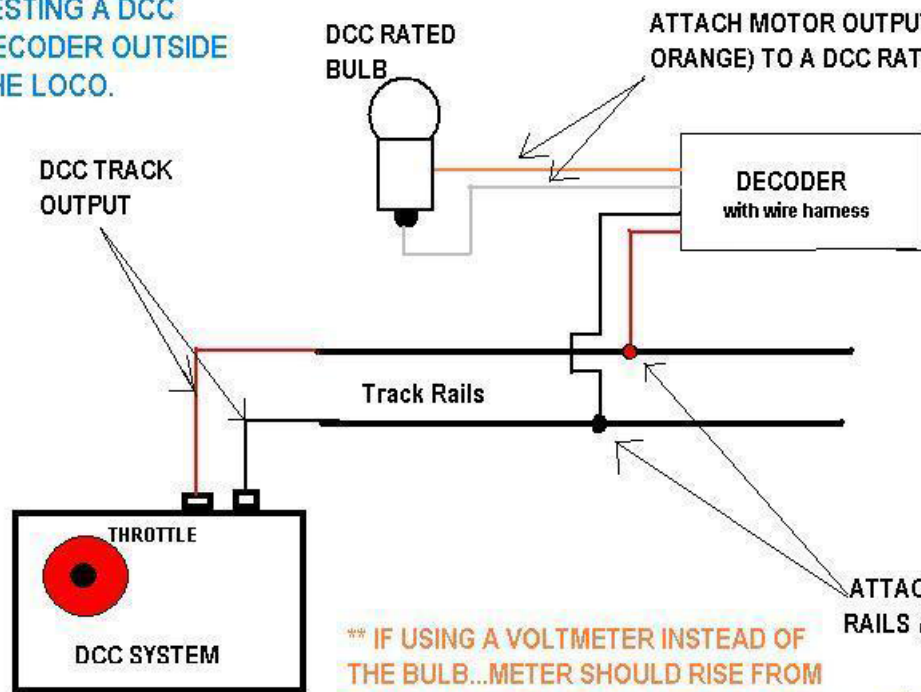

ATTACH MOTOR OUTPUT WIRES, (GRAY AND ORANGE) TO A DCC RATED BULB OR VOLT METER

MOST DECODERS COME SET TO DEFAULT ADDRESS # 3. WHEN TESTING THE DECODER SELECT ADDRESS 3 ON YOUR DCC SYSTEM AND TURN UP THE THROTTLE SLOWLY. THE BULB SHOULD START GLOWING AND GET BRIGHTER AS SPEED INCREASES.**

**** IF USING A VOLTMETER INSTEAD OF THE BULB...METER SHOULD RISE FROM ZERO VOLTS UP AS YOU INCREASE THE THROTTLE.**

ATTACH WIRES TO YOUR TRACK RAILS (RED AND BLACK) WHEEL PICK_UPS

